




N-888-CM Series Two Component Constant Flow Rate Shot Meter Dispenser Series

Bead or Rapid Fire Shot Applications



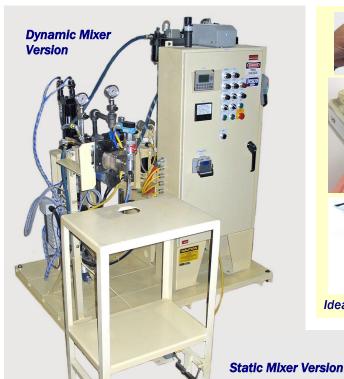



Ideal for Rapid Clip Fill

Available System Features:

- Shot size from .5 to 600cc
- Viscosities up to 2 million CPS
- 5000 psi maximum working fluid pressure
- Hydraulically Operated
- PLC/Electrically controlled
- Lubed main seal available for moisture sensitive materials (shown)
- 1:1 to 80:1 Ratios
- Positive piston displacement for accurate repeatability
- Shot Counter for missed part detection
 - Ideal for Urethane glass applications



Ideal for Robotized & Semi-Automatic Applications





